



Connecting Intermec Printers to Windows XP via USB


The following instructions are for all DPAS supported Intermec printers.

The Intermec InterDriver EasyCoder PD42 (203 dpi) - IPL driver has been tested and recommended for DPAS use. This driver will support all Intermec printers approved by DPAS.

Please visit the **Support > Software and Hardware** section of the [DPAS Support Web Site](http://www.dpas.gov/Support/SoftwareandHardware.aspx) for a listing of approved DPAS printers.


Downloading Driver Files

1. In your browser, navigate to <http://tinyurl.com/6qq8bc9>
2. Choose **Run**.

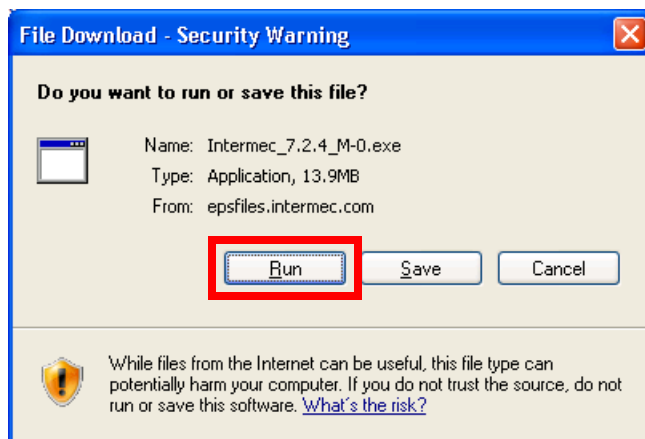




3. If you receive a security warning, click **Run**.

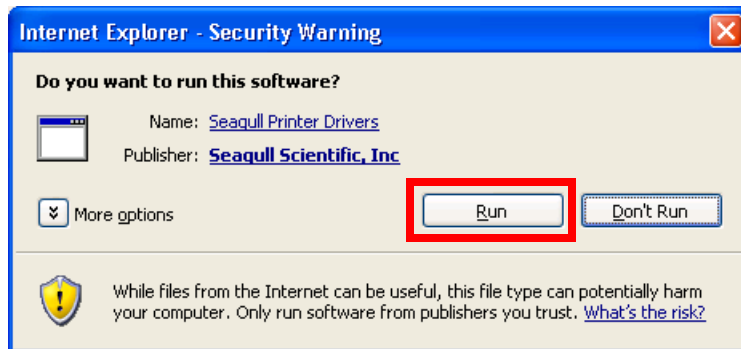


4. Select the **I accept the terms in the license agreement** radio button and choose the **Next** button.

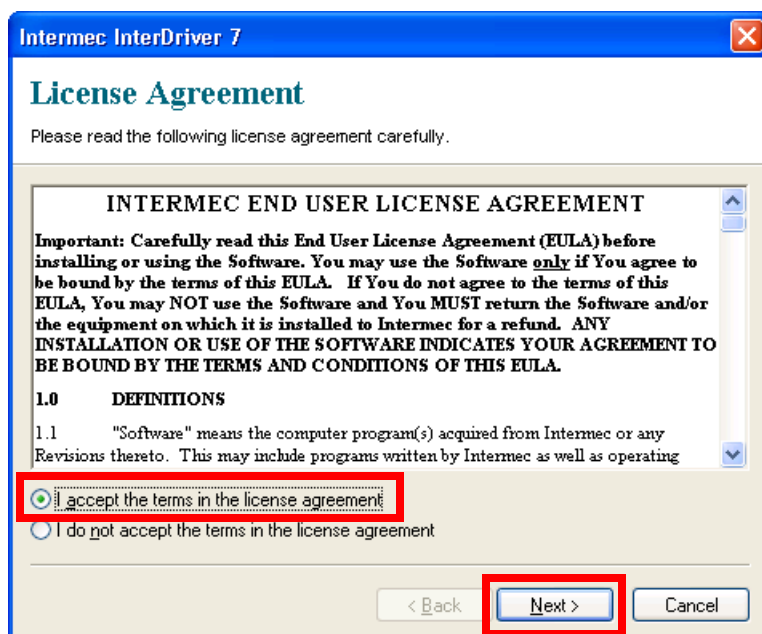




5. Leave the **Installation Directory** at its default and select the **Next** button.

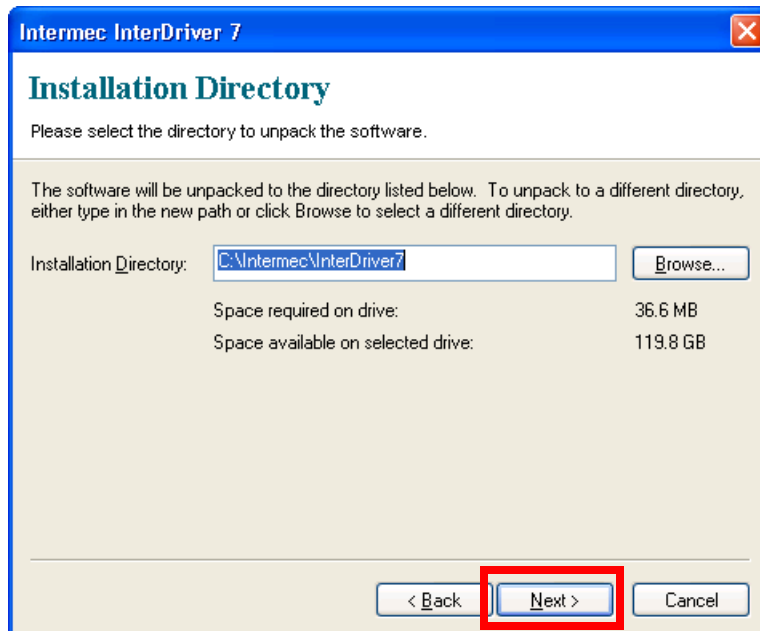

6. Deselect the **Read installation instructions** checkbox and choose the **Finish** button.

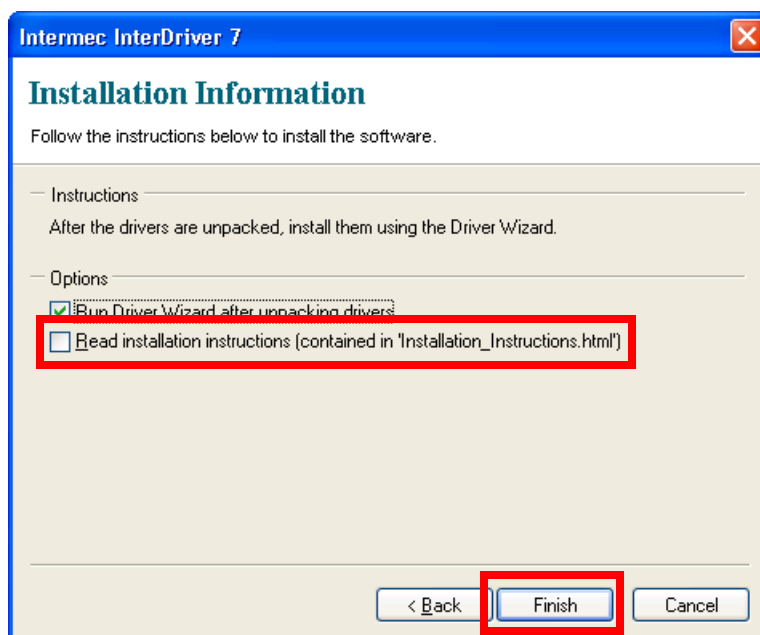

7. Once all files are installed, the **Seagull Driver Wizard** will display.



Installing using the Seagull Driver Wizard


If you are not continuing from the initial download of the InterDriver, navigate to C:\Intermec\InterDriver7 and launch DriverWizard.exe.

1. Select **Install Print Drivers** radio button and choose the **Next** button.






2. Select **EasyCoder PD42 (203 dpi) – IPL** from the **Printer Model** and choose the **Next** button.

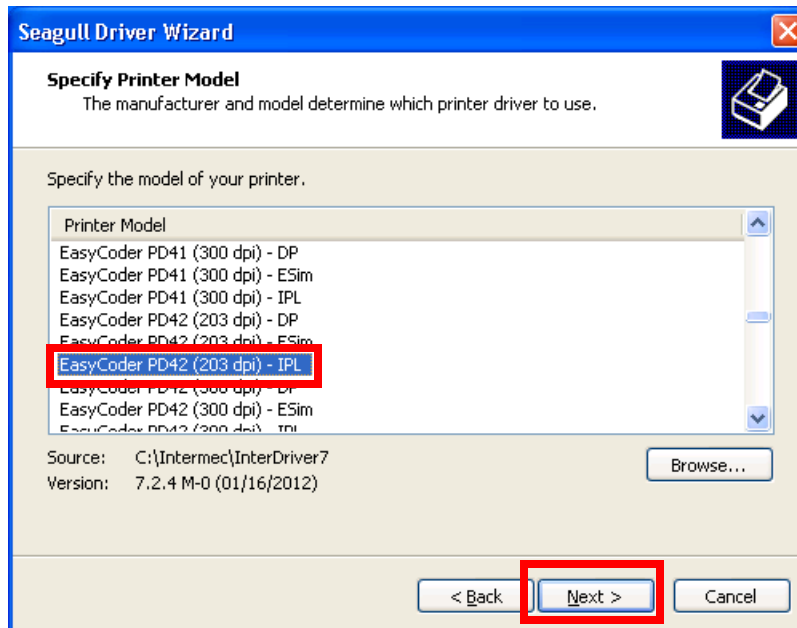

3. Select the USB port the printer is connected to (usually USB001) and choose the **Next** button.

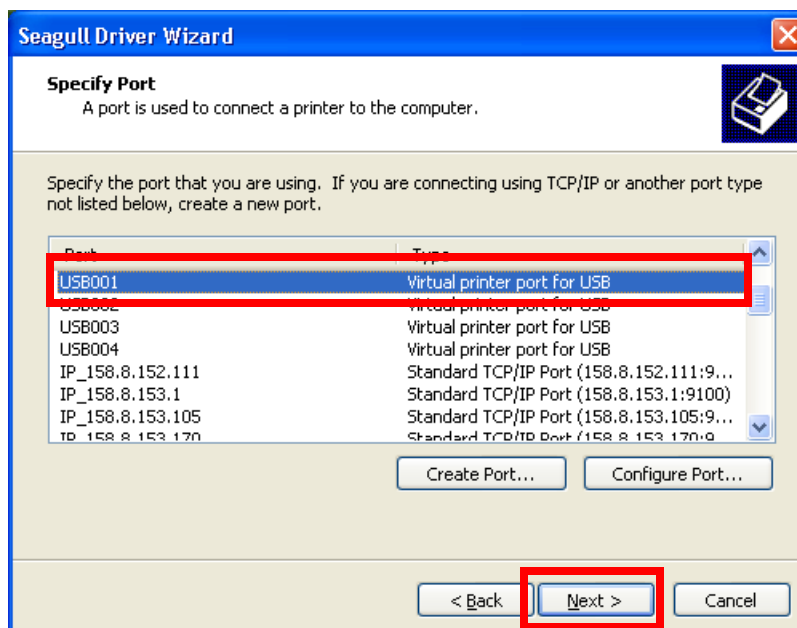



4. Enter a meaningful printer name or leave the default and select the **Next** button.


A screenshot of the "Seagull Driver Wizard" window, titled "Specify Printer Name". The window has a blue header bar with the title and a close button. Below the header, there's a sub-header "Specify Printer Name" and a description: "Names are used to identify the printer on this computer and on the network." To the right of the description is a printer icon. The main area contains the instruction "Enter a name for this printer." followed by a text box labeled "Printer name:" containing the text "EasyCoder PD42 (203 dpi) - IPL". Below this is a checkbox labeled "Use this printer as the default printer" which is unchecked. Further down, it says "Specify whether or not you want to share this printer with other network users. When sharing, you must provide a share name." There are two radio buttons: "Do not share this printer" (selected) and "Share name:" followed by a text box containing "EasyCoder_PD42_(203_dpi)_-IPL". At the bottom are three buttons: "< Back", "Next >" (highlighted with a red box), and "Cancel".

5. The drivers install.

A screenshot of the "Seagull Driver Wizard" window, titled "Installing Drivers". The window has a blue header bar with the title and a close button. Below the header, there's a sub-header "Installing Drivers" and a description: "Please wait while your system is updated." To the right of the description is a printer icon. The main area contains the text "Installing printer 'EasyCoder PD42 (203 dpi) - IPL'..." above a progress bar. The progress bar is a horizontal rectangle with a green fill and a white border, showing approximately 80% completion. At the bottom are three buttons: "< Back", "Finish", and "Cancel".




6. Select the **Finish** button.

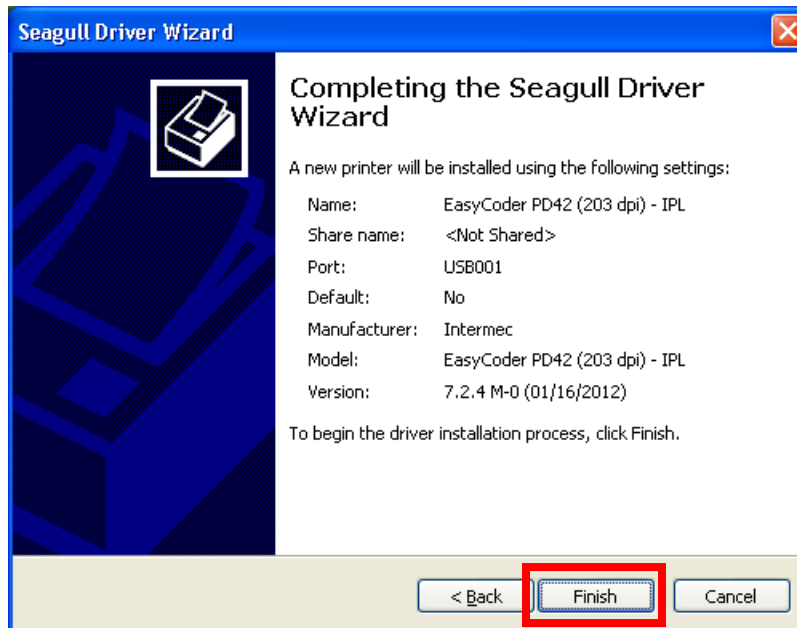




Configuring the Intermec InterDriver

1. Go to **Start > Printers and Faxes**.
2. Right-click on the printer name entered in the "Installing using the Seagull Driver Wizard" section and select **Properties**.

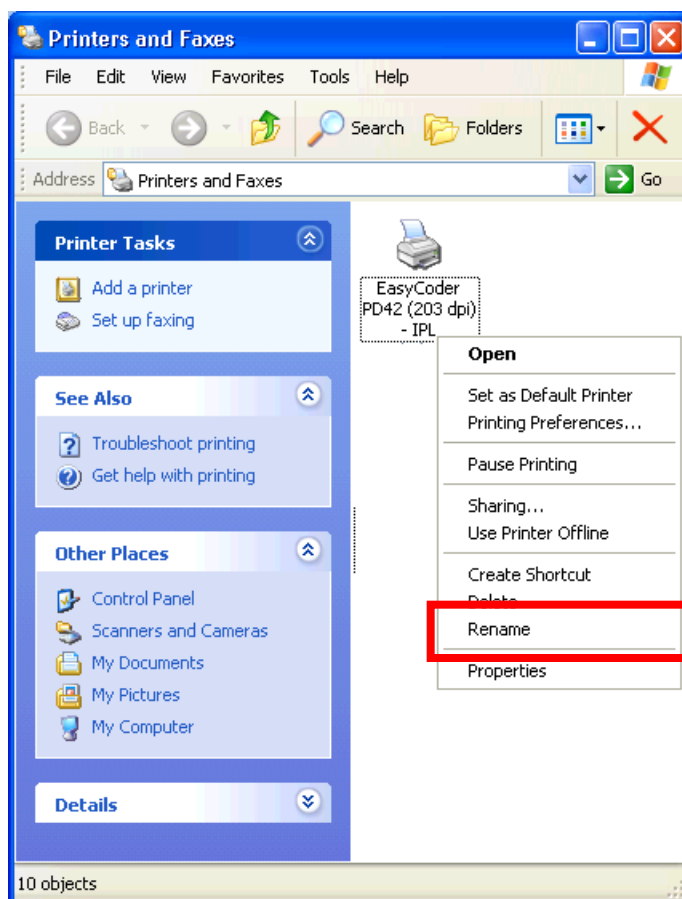




3. Select the **Printing Preferences...** button at the bottom of the **General** tab.

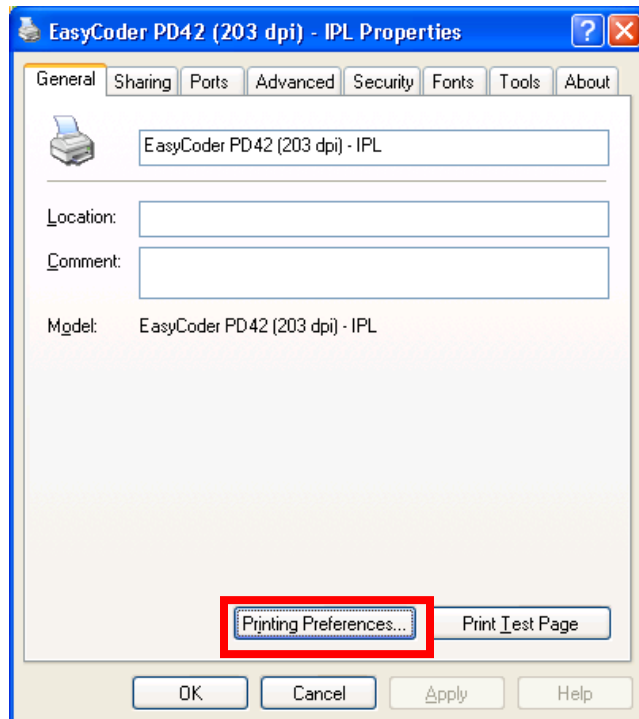




4. Select the **Advanced Options...** button on the **Page Setup** tab.

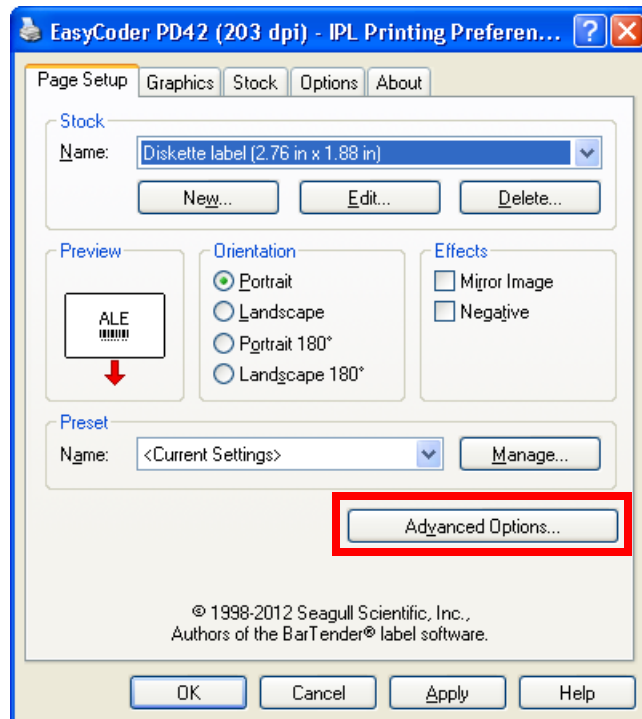



5. Select the **Passthrough** tab.
6. Select the **Enable "Generic/Text Only" mode** checkbox and choose the **OK** button.

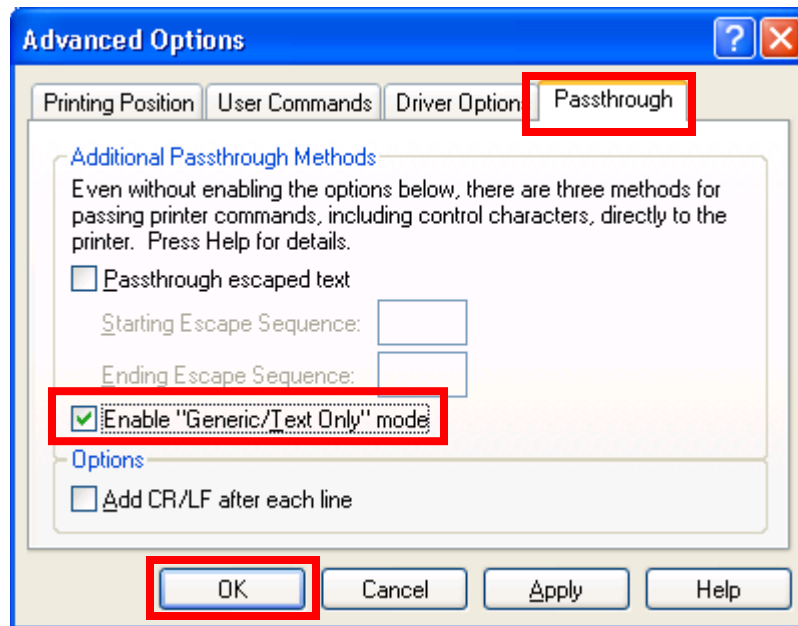


7. Select the **OK** button on the next two dialog boxes to complete the process.



Configuring Internet Explorer

1. Login to DPAS.
2. Navigate to **AIT > Print Labels**.
3. *****IMPORTANT***** Print a label from Web DPAS.
4. Select **File** from the Menu bar. (If the Menu bar is not visible, press the **Alt** key on the keyboard)
5. Select **Page Setup**.

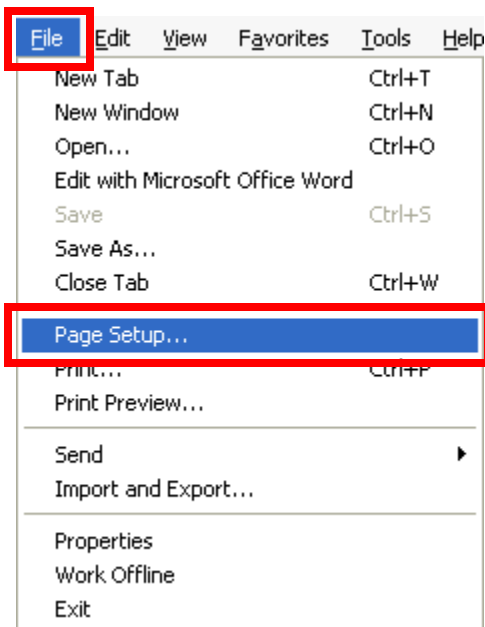



6. Set the **Size** to *User*.
7. Remove all text from the **Header** and **Footer** fields.
8. Verify the **Orientation** is set to *Portrait*.
9. Change the **Left, Right, Top** and **Bottom** Margin settings to *0*. Margins may adjust after the **OK** button is selected.
10. Select **OK** on the **Page Setup** dialog box.

A screenshot of the "Page Setup" dialog box. The "Paper" section has "Size" set to "User defined" and "Source" set to "Manual feed". The "Headers and Footers" section has empty text boxes for "Header" and "Footer". The "Orientation" section has "Portrait" selected. The "Margins (inches)" section has "Left", "Right", "Top", and "Bottom" all set to "0". The "OK" button is highlighted with a red box. A preview of a label is shown on the right side of the dialog.

11. You are now ready to print labels.